


Elevation Key

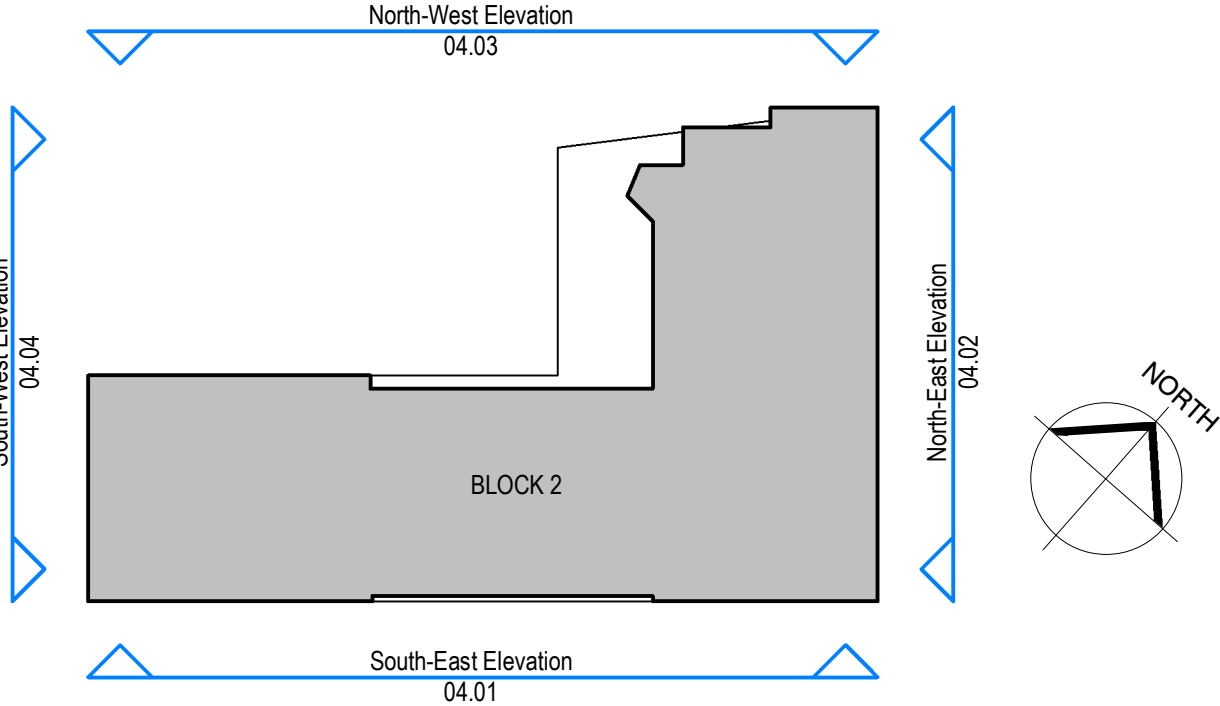

Material Schedule	
Reference	Material
1	Red polished Sandstone coloured cladding panel
2	Portland Stone coloured cladding panel
3	Pale red brick slip cladding panels with natural cement mortar
4	Bronze PPC aluminium curtain wall system with sliding doors and pale Sandstone effect mullions
5	Bronze PPC aluminium curtain wall system with doors (where shown)
6	Bronze PPC aluminium doors
7	Perforated aluminium screening panel with inset printed artwork
8	Bronze PPC aluminium curtain wall system, with opening lights (where shown), spandrel panels and ceramic backed glass panels
9	Pale yellow brick slip cladding panels with natural cement mortar
10	Metal parapet cappings to match standing seam
11	PPC aluminium cladding to lift enclosure
15	Bat habitat boxes to Ecologists details
16	Swift habitat boxes to Ecologists details
17	Flat roofing membrane
18	Sedum green roof system
19	Photovoltaic panels
20	Metal standing seam cladding
21	Bronze PPC Aluminium feature window surrounds

REV	DATE	COMMENT	AUTH/CHKD
C02	11.05.20	Updated for Revised Planning Application	JS/MP
P6	04.05.20	Draft Issue	JS/MP
C01	15.10.19	Planning Issue	PA / MP
P5	27.08.19	DRAFT PLANNING APPLICATION ISSUE	PA / MP
P4	19.08.19	ISSUED FOR CO-ORDINATION	PA / MP
P3	10.08.19	DESIGN DEVELOPMENT ISSUE FOR INFORMATION	PA / MP
P2	11.07.19	DRAFT ISSUE FOR INFORMATION	PA / MP
P1	07.06.19	DRAFT ISSUE FOR CO-ORDINATION	PA / MP

PROJECT TITLE			
Harlequins Block 2			
DETAIL			
B2 North East Elevation			
DRAWING NUMBER (PROJECT-ORIGINATOR-ZONE-LEVEL-TYPE-ROLE-NUMBER)			
EHQ- LHC - 02 - ZZ - DR - A - 04.04			
STATUS	STATUS DESCRIPTION		
S2	Planning Issue		
REVISION	DATE	SCALE	
C02	03/04/19	1 : 100@A1	
CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE - ONLY FIGURED DIMENSIONS ARE TO BE WORKED FROM - DISCREPANCIES MUST BE REPORTED TO THE ARCHITECT BEFORE PROCEEDING & THIS DRAWING IS COPYRIGHT			LHC PROJECT NUMBER
			17161