



DETAIL 4:
Specification For Protective Barrier

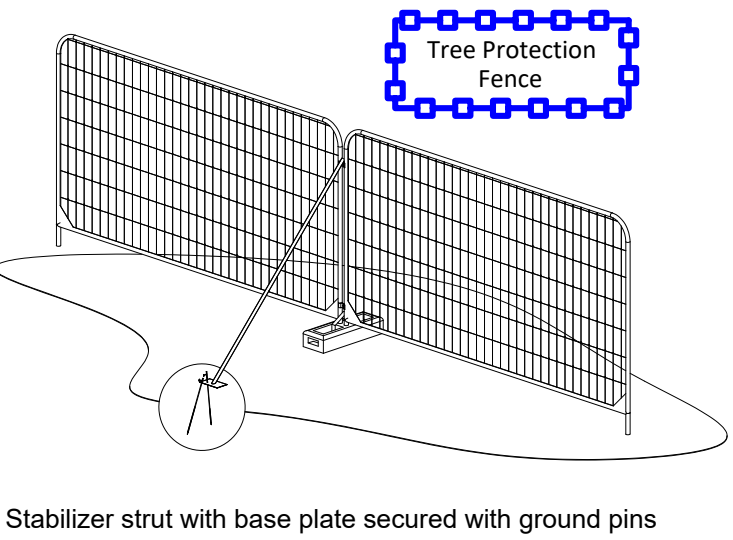


Stabilizer strut with base plate secured with ground pins

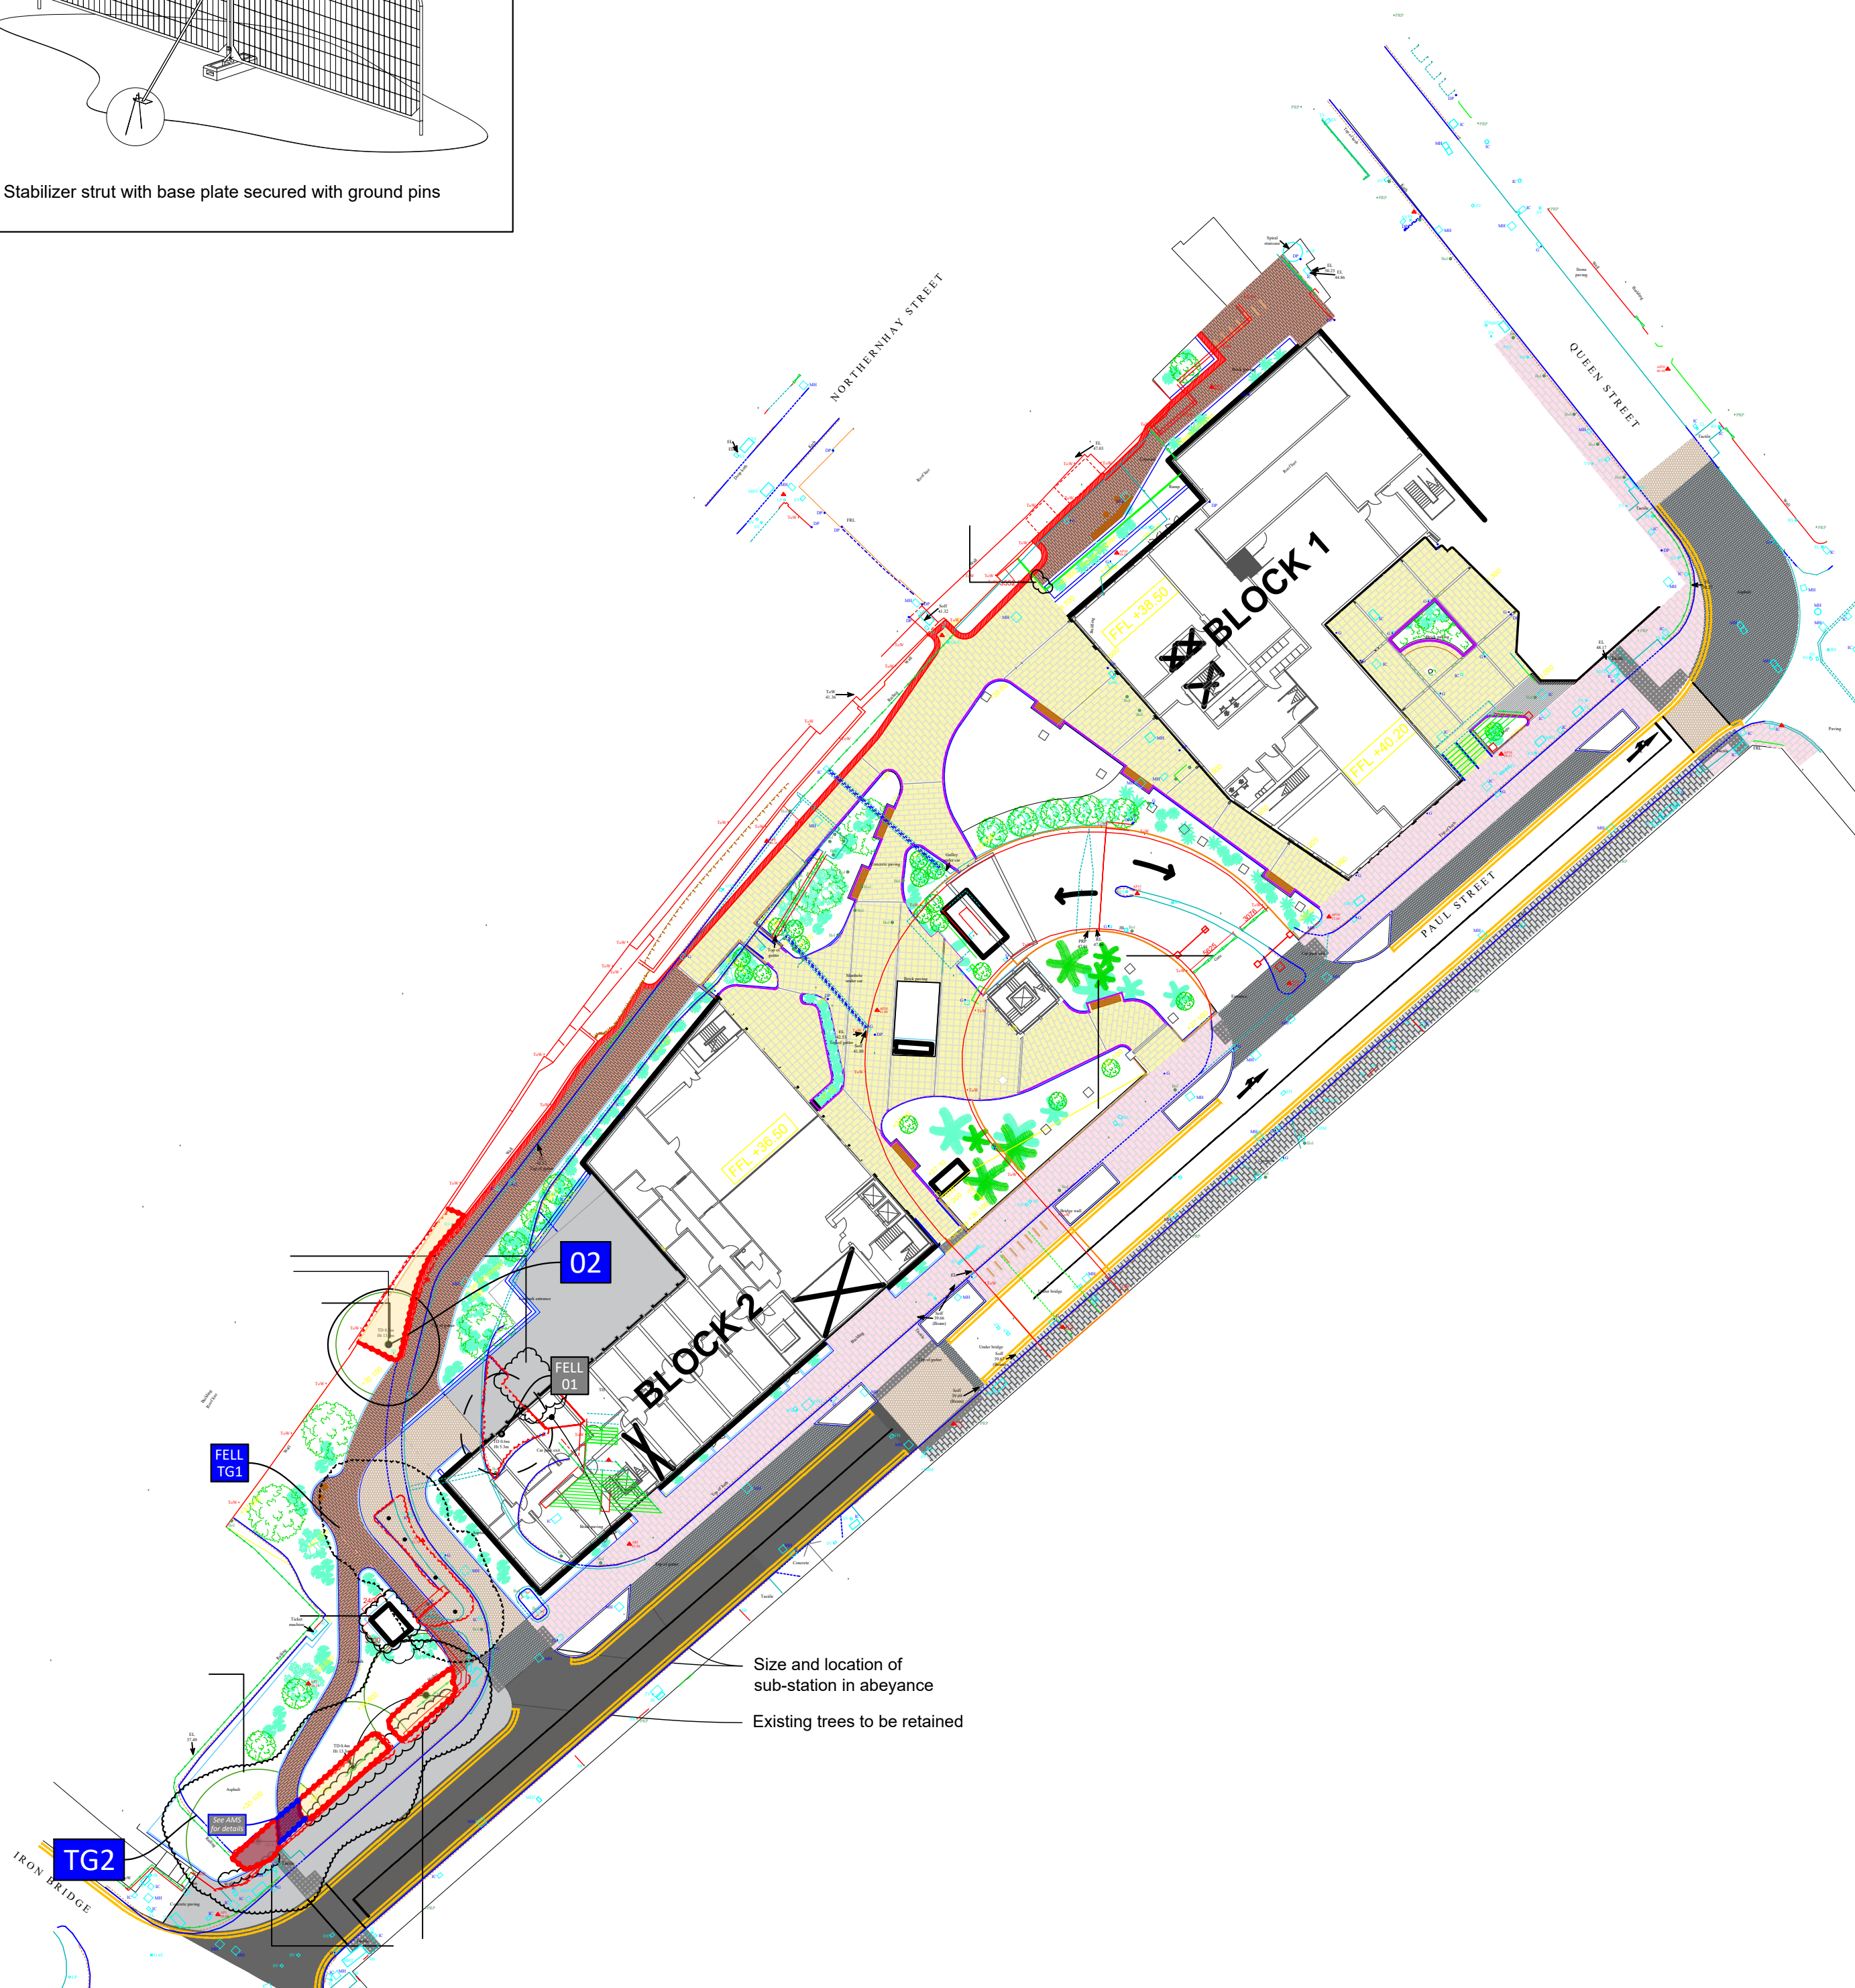

Size and location of sub-station in abeyance
Existing trees to be retained

DETAIL 1:
Specification For Protective Barrier (Default - BS 5837)
Subject to ground conditions and site specific health and safety assessment

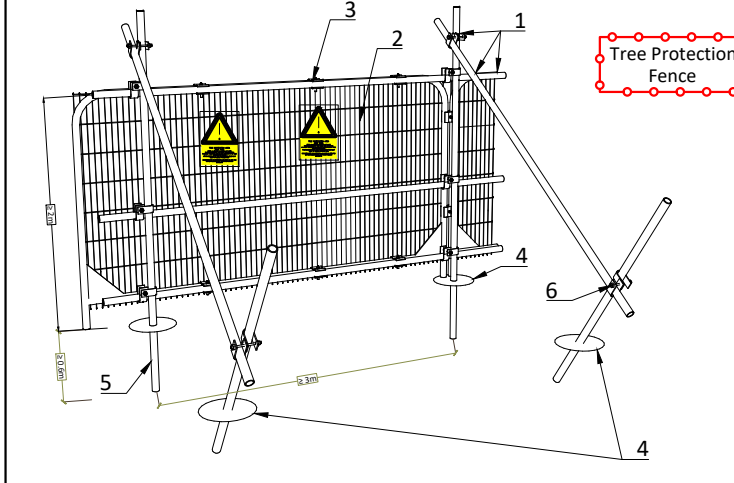


- Key
- 1 Standard scaffold poles
 - 2 Heavy gauge 2m tall galvanized tube and welded mesh infill panels
 - 3 Panels secured to uprights and cross-members with wire ties
 - 4 Ground level
 - 5 Uprights driven into the ground until secure (minimum depth 0.6m)
 - 6 Standard scaffold clamps

1:500

1:200

1:100

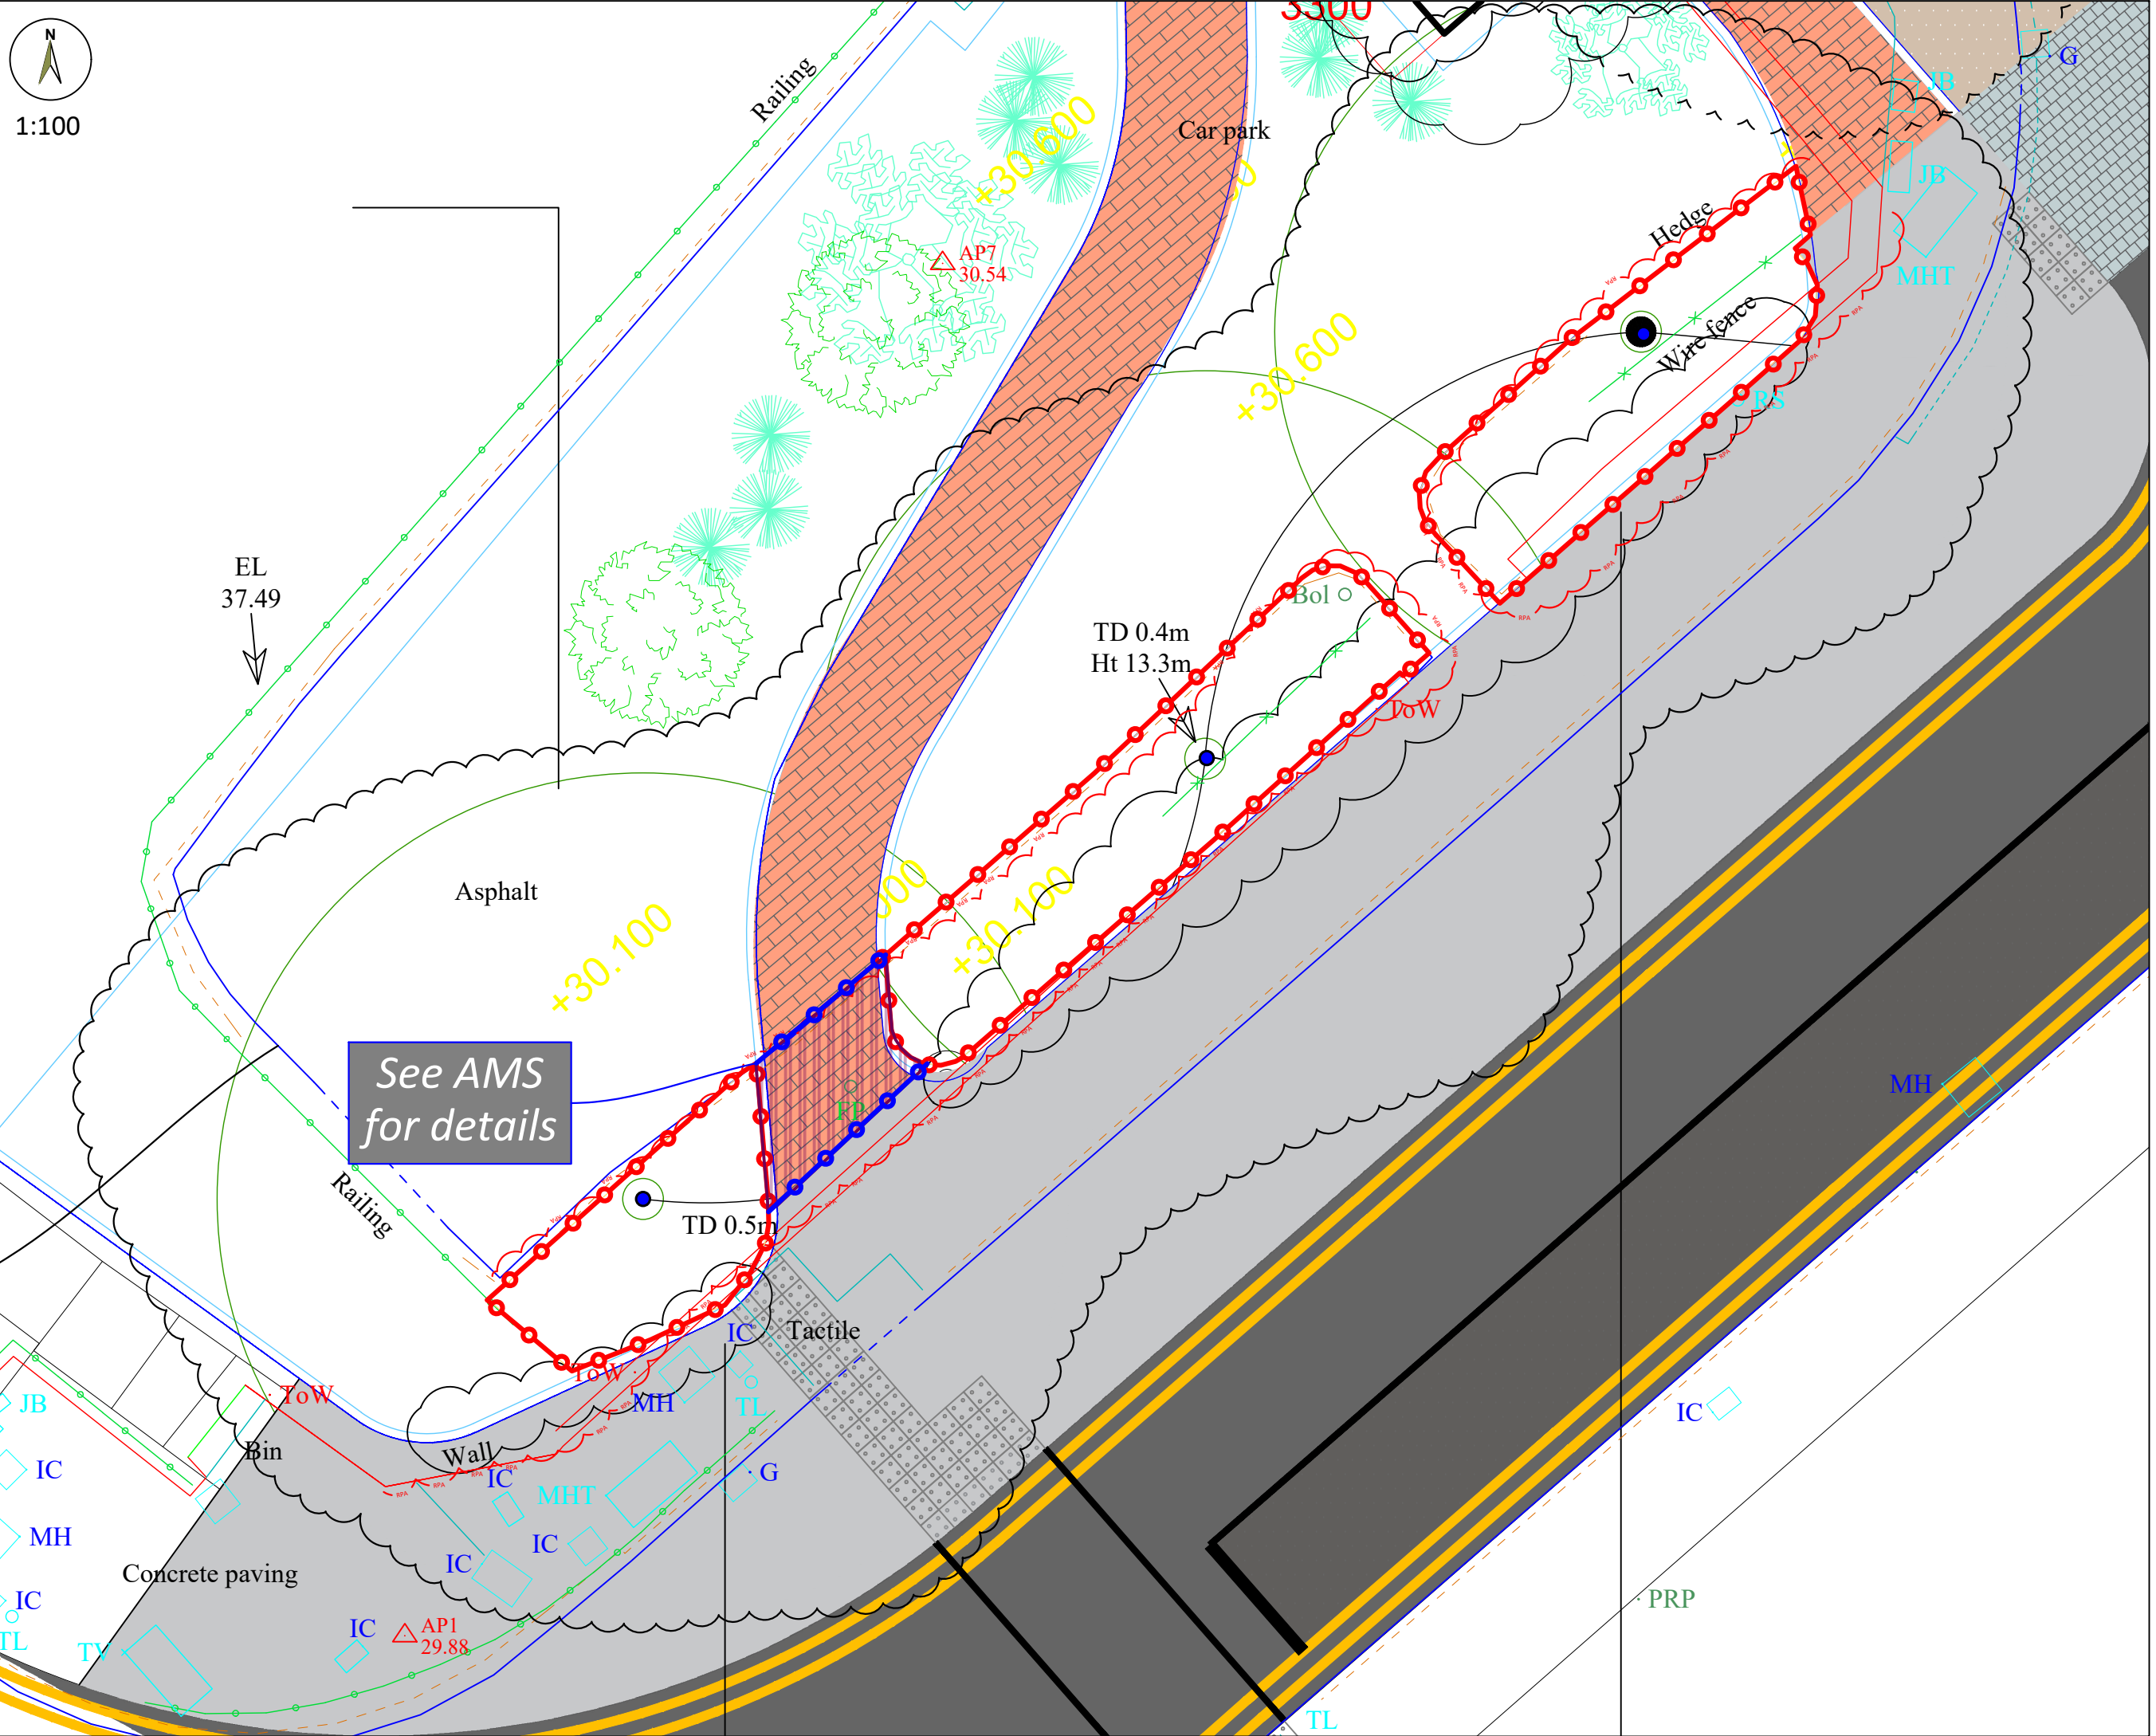

See AMS for details

KEY

BS 5837:2012 Tree Category

A B C U

TREE PROTECTION PLAN - DETAILS

Tree / Hedge Removal

To be removed - Dashed

FELL

Arboricultural Method Statement/s

All AMS areas are to be worked in strict accordance to detailed arboricultural method statements.

Special protection area - AMS

AMS: a detailed Arboricultural Method Statement to be agreed with the LPA prior to commencement of development

Fencing will only be removed when works are taking place to install pathway. These works will be carried out under supervision of the arboricultural clerk.

Construction Exclusion Zone/s

Construction Exclusion Zone - CEZ

All operations inside of Tree Protective Fencing are to be supervised by an appointed arboriculturalist.

Tree protective barrier/s

Tree protective fence / barrier (See Detail 1)

Tree protective fence / barrier (See Detail 4)

Documents/plans supplied by client for use in this drawing:

Topo Survey LHC118_LS

Fixed Layout 17161-L93.01.C

Accompanying documents which must be read in conjunction with this drawing:

05215.AMS1. 2.10.19

05215.AIA.10.10.19

05215.TPC.15.01.2019

05215.TREESURVEY.09.01.2019

Notes

- All dimensions are in metres, unless otherwise stated.
- The original of this drawing was produced in colour, a monochrome version should therefore not be relied upon.

Client:	Curlew Alternative Property LP		
Project:	Harlequins Centre, Exeter, Paul St.		
Title:	Tree Protection Plan 1 of 2		
Date:	2/10/19	Drawn:	KS
Scale:	##### @ A1	Checked:	JEG
Scale:			

Dwg Ref: 05215 TPP 02.10.19

ASPECT

TREE CONSULTANCY

Aspect Tree Consultancy Ltd.

Unit F, Kach Business Park

Pottery Road

Bovey Tracey TQ13 9TZ

Tel: 01364 644822

www.fresh-aspect.com